

# LUXURY VINYL FLOORING

**AUTHENTIC LOOK  
UNFORGETTABLE FEEL**

Featuring **RIGICORE** Technology


ANTISCRATCH     

**VOL. 4 - RIGICORE , GLUE DOWN & TACKY LOOSE LAY**

  
**CONTESSE**



**CLICK WOOD CLASSIC / RIGICORE 5.0** WEARLAYER 0.30



 **RIGICORE 5.0 / RB22401**  
 **GLUEDOWN 2.0 / DB22401**

**HARVARD OAK WHITE**



 RIGICORE 5.0 / RB26128  
 GLUEDOWN 2.0 / DB26128

ASPEN OAK SILVER

\*ALL RIGICORE 5.0 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.0





**CLICK WOOD CLASSIC / RIGICORE 5.0 WEARLAYER 0.30**



 **RIGICORE 5.0 / RB232452513**  
 **GLUEDOWN 2.0 / DB232452513**



**SOFT OAK NATURAL**



 **RIGICORE 5.0 / RB22402**  
 **GLUEDOWN 2.0 / DB22402**



**HARVARD OAK BEIGE**



 RIGICORE 5.0 / RB24615  
 GLUEDOWN 2.0 / DB24615

ASPEN OAK LIMED



 RIGICORE 5.0 / RB24611  
 GLUEDOWN 2.0 / DB24611

ASPEN OAK BLACK



\*ALL RIGICORE 5.0 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.0



# CLICK WOOD CLASSIC / RIGICORE 5.0 WEARLAYER 0.30


\*ALL RIGICORE 5.0 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.0



 RIGICORE 5.0 / **RB22401**  
 GLUEDOWN 2.0 / **DB22401**


HARVARD OAK WHITE



 RIGICORE 5.0 / **RB22402**  
 GLUEDOWN 2.0 / **DB22402**



HARVARD OAK BEIGE



 RIGICORE 5.0 / **RB232452513**  
 GLUEDOWN 2.0 / **DB232452513**



SOFT OAK NATURAL



 RIGICORE 5.0 / **RB24615**  
 GLUEDOWN 2.0 / **DB24615**



ASPEN OAK LIMED



 RIGICORE 5.0 / **RB26128**  
 GLUEDOWN 2.0 / **DB26128**

ASPEN OAK SILVER



 RIGICORE 5.0 / **RB24611**  
 GLUEDOWN 2.0 / **DB24611**

ASPEN OAK BLACK

# CLICK WOOD / RIGICORE 5.0

CONSTRUCTION / CONSTRUCTION / COSTRUZIONE / CONSTRUCTIE / KONSTRUKTION	
TOTAL THICKNESS / EPAISSEUR TOTALE / SPESSORE / TOTALE DIKTE / TOTAL DICKE	
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / SLIJTLAG / NUTZSCHICHT	
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKERSKLASSE / STRAPAZIERKLASSE	EN 16511 - EN ISO 10582
COATING / PROTECTION / RIVSTIMENTO / BESCHERMING / BESCHICHTUNG	
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR / STRUKTUR	
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF / ABGESCHRÄGT	
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL / ABMESSUNG DER DIELEN	
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING / KARTONVERPACKUNG	
PALLET PACKING / BÔTES PAR PALETTE / NIR SCATOLE À PALETTA / DOZEN PER PALLET / VERPACKUNG AUF PALETTE	
GROSS WEIGHT PER PALLET / POIDS BRUT PAR PALETTE / PESO LORDO À PALETTA / GEWICHT BRUTO PER PALLET / BRUTTO GEWICHT PRO PALETTE	
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAÎSE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAUSTOEL / STUHLROLLENWIDERSTAND	EN ISO 4918 - EN 425
MICRO-SCRATCH RESISTANCE / RÉSISTANCE AUX MICRO-RAYURES / RESISTENZA AI MICRO-GRAFFI / MICRO-KRASBESTENDIGHEID / MIKROKRATZWIDERSTAND	EN 16094
ELECTROSTATIC PERFORMANCE / POTENIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTROSTATICA / ELECTROSTATISCHE EIGENSCHAPPEN / ELEKTROSTATISCHE EIGENSCHAFT	EN 1815
SLIP RESISTANCE / ANTIDÉPARANT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND / RUTSCHFESTIGKEIT	DIN 51130
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTENZA ALL'USURA / SLIJTVASTHEID / VERSCHLEISSBESTÄNDIGKEIT	EN 660-2
RESIDUAL INDENTATION / POINÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELIHEID / RESTEINDRUCK	EN ISO 24343-1
DIMENSIONAL STABILITY / STABILITÉ DIMENSIONNELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT / DIMENSIONSSTABILITÄT	EN 434
FIRE RATING / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE / BRANDKLASSE	EN ISO 9239-1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE / FORMALDEHYD-EMISSION	EN 717-1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK / GARANTIE FÜR PRIVATGEBRAUCH	
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK / GARANTIE FÜR KOMMERZIELLEN GEBRAUCH	

\* VALID FOR LIGHT COMMERCIAL USE AS DESCRIBED BY CLASS 31

	CLICK WOOD CLASSIC RIGICORE 5.0	WOOD CLASSIC GLUE DOWN 2.0
	4.0 MM RIGICORE + 1 MM IXPE	2.0 MM SOLID VINYL
	5.0 MM	2.0 MM
	0.3 MM	0.3 MM
	CLASS 32	CLASS 31
	PU-GUARD	PU-GUARD
	NATURAL	NATURAL
	YES	YES
	178 X 1219 MM	184 X 1219 MM
	2.17 M <sup>2</sup> 10 PLANKS	3.37 M <sup>2</sup> 15 PLANKS
	45 PACKS / PALLET	75 PACKS / PALLET
	900 KG	955 KG
	PASS	PASS
	≥ MSR-B3	≥ MSR-B3
	< 2 KV	< 2 KV
	R9/R10 DEPENDING ON EMBOSING	R9/R10 DEPENDING ON EMBOSING
	GROUP T	GROUP T
	PASS	PASS
	PASS	PASS
	BFL-S1	BFL-S1
	CLASS E1	CLASS E1
	15 YEARS	15 YEARS
	5 YEARS*	5 YEARS*

**CLICK WOOD WIDE / RIGICORE 5.5 WEARLAYER 0.55**





 **RIGICORE 5.5 / RS80008**  
**GLUEDOWN 2.5 / DB80008**

**ELEGANT OAK MILD**






 RIGICORE 5.5 / RS25105  
 GLUEDOWN 2.5 / DB25105



SOFT OAK CHARCOAL

\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5

\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0


**CLICK WOOD WIDE / RIGICORE 5.5** WEARLAYER 0.55




 **RIGICORE 5.5 / RS25118**  
 **GLUEDOWN 2.5 / DB25118**

**SOFT OAK BREIGE**




 RIGICORE 5.5 / RS25220  
 GLUEDOWN 2.5 / DB25220

 TACKY LOOSE LAY 5.0 / LL25220

COOL OAK SILVER


\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5


\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0



# CLICK WOOD WIDE / RIGICORE 5.5 WEARLAYER 0.55





 RIGICORE 5.5 / RS25221  
 GLUEDOWN 2.5 / DB25221

 TACKY LOOSE LAY 5.0 / LL25221


COOL OAK GOLD



 RIGICORE 5.5 / RS21513  
 GLUEDOWN 2.5 / DB21513

FRENCH OAK

\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5

\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0



**CLICK WOOD WIDE / RIGICORE 5.5** WEARLAYER 0.55



RIGICORE 5.5 / RS23322  
GLUEDOWN 2.5 / DB23322





TACKY LOOSE LAY 5.0 / LL23322

NATURAL OAK PLAIN






 RIGICORE 5.5 / **RS23308**  
 GLUEDOWN 2.5 / **DB23308**

NATURAL OAK SMOKED




 RIGICORE 5.5 / **RS25310**  
 GLUEDOWN 2.5 / **DB25310**

 TACKY LOOSE LAY 5.0 / **LL25310**

WRECKED OAK BROWN

\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5



\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0

# CLICK WOOD WIDE / RIGICORE 5.5 WEARLAYER 0.55




\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5


\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0





 RIGICORE 5.5 / **RS25118** SOFT OAK BREIGE  
 GLUEDOWN 2.5 / **DB25118**

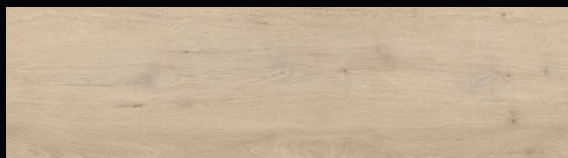


 RIGICORE 5.5 / **RS25221** COOL OAK GOLD  
 GLUEDOWN 2.5 / **DB25221**  
 TACKY LOOSE LAY 5.0 / **LL25221**






 RIGICORE 5.5 / **RS80008** ELEGANT OAK MILD  
 GLUEDOWN 2.5 / **DB80008**





 RIGICORE 5.5 / **RS23322** NATURAL OAK PLAIN  
 GLUEDOWN 2.5 / **DB23322**  
 TACKY LOOSE LAY 5.0 / **LL23322**





 RIGICORE 5.5 / **RS25220** COOL OAK SILVER  
 GLUEDOWN 2.5 / **DB25220**  
 TACKY LOOSE LAY 5.0 / **LL25220**





 RIGICORE 5.5 / **RS23308** NATURAL OAK SMOKED  
 GLUEDOWN 2.5 / **DB23308**






 RIGICORE 5.5 / **RS25105** SOFT OAK CHARCOAL  
 GLUEDOWN 2.5 / **DB25105**



 RIGICORE 5.5 / **RS21513** FRENCH OAK  
 GLUEDOWN 2.5 / **DB21513**



 RIGICORE 5.5 / **RS25310** WRECKED OAK BROWN  
 GLUEDOWN 2.5 / **DB25310**  
 TACKY LOOSE LAY 5.0 / **LL25310**

# WOOD WIDE / RIGICORE CLICK 5.5



CONSTRUCTION / CONSTRUCTION / COSTRUZIONE / CONSTRUCTIE / KONSTRUKTION	
TOTAL THICKNESS / EPAISSEUR TOTALE / SPESSORE / TOTALE DIKTE / TOTAL DICKE	
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / SLIJTLAG / NUTZSCHICHT	
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKERSKLASSE / STRAPAZIERKLASSE	
COATING / PROTECTION / RIVSTIMENTO / BESCHERMING / BESCHICHTUNG	EN 16511 - EN ISO 10582
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR / STRUKTUR	
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF / ABGESCHRÄGT	
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL / ABMESSUNG DER DIELEN	
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING / KARTONVERPACKUNG	
PALLET PACKING / BOÎTES PAR PALETTE / NR SCATOLE À PALETTA / DOZEN PER PALLET / VERPACKUNG AUF PALETTE	
GROSS WEIGHT PER PALLET / POIDS BRUT PAR PALETTE / PESO LORDO À PALETTA / GEWICHT BRUTO PER PALLET / BRUTTO GEWICHT PRO PALETTE	
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAISE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAUSTOEL / STUHLROLLENWIDERSTAND	EN ISO 4918 - EN 425
MICRO-SCRATCH RESISTANCE / RÉSISTANCE AUX MICRO-RAYURES / RESISTENZA AI MICRO-GRAFFI / MICRO-KRASBESTENDIGHEID / MIKROKRATZWIDERSTAND	EN 16094
ELECTROSTATIC PERFORMANCE / POTENTIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTRISTATICA / ELECTROSTATISCHE EIGENSCHAPPEN / ELEKTROSTATISCHE EIGENSCHAFT	EN 1815
SLIP RESISTANCE / ANTIDÉPARANT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND / RUTSCHFESTIGKEIT	DIN 51130
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTANCE ALL'USURA / SLIJTVASTHEID / VERSCHLEISSBESTÄNDIGKEIT	EN 660-2
RESIDUAL INDENTATION / POINÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELIHEID / RESTEINDRUCK	EN ISO 24343-1
DIMENSIONAL STABILITY / STABILITÉ DIMENSIONNELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT / DIMENSIONSSTABILITÄT	EN 434
FIRE RATING / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE / BRANDKLASSE	EN ISO 9239-1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE / FORMALDEHYD-EMISSION	EN717-1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK / GARANTIE FÜR PRIVATEGEBRAUCH	
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK / GARANTIE FÜR KOMMERZIELLEN GEBRAUCH	

	WOOD WIDE RIGICORE CLICK 5.5	WOOD WIDE TACKY LOOSE LAY 5.0	WOOD CLASSIC GLUE DOWN 2.5
	4.0 MM RIGICORE + 1.5 MM IXPE	5.0 MM SOLID VINYL	2.5 MM SOLID VINYL
	5.5 MM	5.0 MM	2.5 MM
	0.55 MM	0.55 MM	0.55 MM
	CLASS 34	CLASS 33 CLASS 42	CLASS 33 CLASS 42
	PU-GUARD	ANTISCRATCH PU-GUARD	ANTISCRATCH PU-GUARD
	NATURAL	NATURAL	NATURAL
	YES	YES	YES
	220 X 1219 MM	229 X 1219 MM	184 X 1219 MM
	2.146 M <sup>2</sup> 8 PLANKS	1.672 M <sup>2</sup> 6 PLANKS	3.37 M <sup>2</sup> 15 PLANKS
	44 PACKS / PALLET	60 PACKS / PALLET	65 PACKS / PALLET
	860 KG	980 KG	1030 KG
	PASS	PASS	PASS
	≥ MSR-B3	MSR-B1	≥ MSR-B2
	< 2 KV	< 2 KV	< 2 KV
	R9/R10 DEPENDING ON EMBOSSING	R9/R10 DEPENDING ON EMBOSSING	R9/R10 DEPENDING ON EMBOSSING
	GROUP T	GROUP T	GROUP T
	PASS	PASS	PASS
	PASS	PASS	PASS
	BFL-S1	BFL-S1	BFL-S1
	CLASS E1	CLASS E1	CLASS E1
	25 YEARS	25 YEARS	25 YEARS
	10 YEARS	10 YEARS	10 YEARS





**CLICK STONE CLASSIC / RIGICORE 5.0 WEARLAYER 0.30**



 **RIGICORE 5.0 / RB36542**  
 **GLUEDOWN 2.0 / DB36542**

**WHIPPED CONCRETE GREIGE**





 RIGICORE 5.0 / **RB36536**  
 GLUEDOWN 2.0 / **DB36536**

SANDED CONCRETE DARK

\*ALL RIGICORE 5.0 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.0



**CLICK STONE CLASSIC / RIGICORE 5.0** WEARLAYER 0.30



 **RIGICORE 5.0 / RB36542**  
 **GLUEDOWN 2.0 / DB36542**

**WHIPPED CONCRETE GREIGE**



 **RIGICORE 5.0 / RB36536**  
 **GLUEDOWN 2.0 / DB36536**

**SANDED CONCRETE DARK**

\*ALL RIGICORE 5.0 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.0



# CLICK STONE CLASSIC / RIGICORE 5.0



CONSTRUCTION / CONSTRUCTION / COSTRUZIONE / CONSTRUCTIE / KONSTRUKTION	
TOTAL THICKNESS / EPAISSEUR TOTALE / SPESSORE / TOTALE DIKTE / TOTAL DICKE	
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / SLIJTLAG / NUTZSCHICHT	
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKERSKLASSE / STRAPAZIERKLASSE	EN 16511 - EN ISO 10582
COATING / PROTECTION / RIVSTIMENTO / BESCHERMING / BESCHICHTUNG	
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR / STRUKTUR	
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF / ABGESCHRÄGT	
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL / ABMESSUNG DER DIELEN	
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING / KARTONVERPACKUNG	
PALLET PACKING / BOÎTES PAR PALETTE / NR SCATOLE À PALETTA / DOZEN PER PALLET / VERPACKUNG AUF PALETTE	
GROSS WEIGHT PER PALLET / POIDS BRUT PAR PALETTE / PESO LORDO À PALETTA / GEWICHT BRUTO PER PALLET / BRUTTO GEWICHT PRO PALETTE	
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAISE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAU STOEL / STUHLROLLENWIDERSTAND	EN ISO 4918 - EN 425
MICRO-SCRATCH RESISTANCE / RÉSISTANCE AUX MICRO-RAYURES / RESISTENZA AI MICRO-GRAFFI / MICRO-KRASBESTENDIGHEID / MIKROKRATZWIDERSTAND	EN 16094
ELECTROSTATIC PERFORMANCE / POTENTIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTROSTATICA / ELECTROSTATISCHE EIGENSCHAPPEN / ELEKTROSTATISCHE EIGENSCHAFT	EN 1815
SLIP RESISTANCE / ANTIDÉPARANT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND / RUTSCHFESTIGKEIT	DIN 51130
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTANCE ALL'USURA / SLIJTVASTHEID / VERSCHLEISSBESTÄNDIGKEIT	EN 660-2
RESIDUAL INDENTATION / POINÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELIHEID / RESTEINDRUCK	EN ISO 24343-1
DIMENSIONAL STABILITY / STABILITÉ DIMENSIONELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT / DIMENSIONSSTABILITÄT	EN 434
FIRE RATING / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE / BRANDKLASSE	EN ISO 9239-1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE / FORMALDEHYD-EMISSION	EN 717-1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDDELIJK GEBRUIK / GARANTIE FÜR PRIVATEGEBRAUCH	
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK / GARANTIE FÜR KOMMERZIELLEN GEBRAUCH	

\* VALID FOR LIGHT COMMERCIAL USE AS DESCRIBED BY CLASS 31

	CLICK STONE CLASSIC RIGICORE 5.0	STONE CLASSIC GLUE DOWN 2.0
	4.0 MM RIGICORE + 1 MM IXPE	2.0 MM SOLID VINYL
	5.0 MM	2.0 MM
	0.3 MM	0.3 MM
	CLASS 32	CLASS 31
	PU-GUARD	PU-GUARD
	NATURAL	NATURAL
	YES	YES
	305 X 610 MM	305 X 610 MM
	1.86 M <sup>2</sup> 10 TILES	3.34 M <sup>2</sup> 18 TILES
	60 PACKS / PALLET	66 PACKS / PALLET
	975 KG	782 KG
	PASS	PASS
	≥ MSR-B3	≥ MSR-B3
	< 2 KV	< 2 KV
	R9/R10 DEPENDING ON EMBOSSING	R9/R10 DEPENDING ON EMBOSSING
	GROUP T	GROUP T
	PASS	PASS
	PASS	PASS
	BFL-S1	BFL-S1
	CLASS E1	CLASS E1
	15 YEARS	15 YEARS
	5 YEARS*	5 YEARS*



**CLICK STONE XL / RIGICORE 5.5** WEARLAYER 0.55




 **RIGICORE 5.5 / RS86548**  
 **GLUEDOWN 2.5 / DB86548**

**METAL PLATE RUSTY**






 RIGICORE 5.5 / **RS11843**  
 GLUEDOWN 2.5 / **DB11843**

 TACKY LOOSE LAY 5.0 / **LL11843**

PACIFIC LIMESTONE MEDIUM




 RIGICORE 5.5 / **RS11824**  
 GLUEDOWN 2.5 / **DB11824**

 TACKY LOOSE LAY 5.0 / **LL11824**

POLISHED LIMESTONE LIGHT



\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5

\*\*THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0





**CLICK STONE XL / RIGICORE 5.5** WEARLAYER 0.55




 RIGICORE 5.5 / RS33442  
 GLUEDOWN 2.5 / DB33442

AQUAREL WHITE TILE




 RIGICORE 5.5 / **RS66542**  
 GLUEDOWN 2.5 / **DB66542**

 TACKY LOOSE LAY 5.0 / **LL66542**

CARIBBEAN LIMESTONE GREY


\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5

\*\* THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0





# CLICK STONE XL / RIGICORE 5.5 WEARLAYER 0.55




\*ALL RIGICORE 5.5 PRODUCTS ARE ALSO AVAILABLE AS GLUE DOWN 2.5

\*\*THE COLORS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0




 RIGICORE 5.5 / **RS33442**      **AQUAREL WHITE TILE**  
 GLUEDOWN 2.5 / **DB33442**



 RIGICORE 5.5 / **RS66542**      **CARIBBEAN LIMESTONE GREY**  
 GLUEDOWN 2.5 / **DB66542**  
 TACKY LOOSE LAY 5.0 / **LL66542**





 RIGICORE 5.5 / **RS11824**      **POLISHED LIMESTONE LIGHT**  
 GLUEDOWN 2.5 / **DB11824**  
 TACKY LOOSE LAY 5.0 / **LL11824**



 RIGICORE 5.5 / **RS66548**      **METAL PLATE RUSTY**  
 GLUEDOWN 2.5 / **DB66548**



 RIGICORE 5.5 / **RS11843**      **PACIFIC LIMESTONE MEDIUM**  
 GLUEDOWN 2.5 / **DB11843**  
 TACKY LOOSE LAY 5.0 / **LL11843**



# STONE XL / RIGICORE CLICK 5.5

CONSTRUCTION / CONSTRUCTION / COSTRUZIONE / CONSTRUCTIE / KONSTRUKTION	
TOTAL THICKNESS / EPAISSEUR TOTALE / SPESSORE / TOTALE DIKTE / TOTAL DICKE	
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / Slijtlaag / Nutzschiicht	
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKERSKLASSE / STRAPAZIERKLASSE	EN 16511 - EN ISO 10582
COATING / PROTECTION / RIVSTIMENTO / BESCHERMING / BESCHICHTUNG	
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR / STRUKTUR	
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF / ABGESCHRÄGT	
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL / ABMESSUNG DER DIELEN	
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING / KARTONVERPACKUNG	
PALLET PACKING / BOÎTES PAR PALETTE / NR SCATOLE À PALETTE / DOZEN PER PALLET / VERPACKUNG AUF PALETTE	
GROSS WEIGHT PER PALLET / POIDS BRUT PAR PALETTE / PESO LORDO À PALETTE / GEWICHT BRUTO PER PALLET / BRUTTO GEWICHT PRO PALETTE	
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAISE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAUSTOEL / STUHLROLLENWIDERSTAND	EN ISO 4918 - EN 425
MICRO-SCRATCH RESISTANCE / RÉSISTANCE AUX MICRO-RAYURES / RESISTENZA AI MICRO-GRAFFI / MICRO-KRASBESTANDIGHEID / MIKROKRATZWIDERSTAND	EN 16094
ELECTROSTATIC PERFORMANCE / POTENTIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTROSTATICA / ELECTROSTATISCHE EIGENSCHAPPEN / ELEKTROSTATISCHE EIGENSCHAFT	EN 1815
SLIP RESISTANCE / ANTIDÉPARANT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND / RUTSCHFESTIGKEIT	DIN 51130
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTANCE ALL'USURA / Slijtvastheid / Verschleissbeständigkeit	EN 660-2
RESIDUAL INDENTATION / POINÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELIHEID / RESTENDRUCK	EN ISO 24343-1
DIMENSIONAL STABILITY / STABILITÉ DIMENSIONNELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT / DIMENSIONSSTABILITÄT	EN 434
FIRE RATING / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE / BRANDKLASSE	EN ISO 9239-1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDEHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYDE EMISSIE / FORMALDEHYD-EMISSION	EN 717-1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK / GARANTIE FÜR PRIVATEGEBRAUCH	
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK / GARANTIE FÜR KOMMERZIELLEN GEBRAUCH	

	STONE XL RIGICORE CLICK 5.5	STONE XL TACKY LOOSE LAY 5.0	STONE XL GLUE DOWN 2.5
	4,0 MM RIGICORE + 1,5 MM IXPE	5,0 MM SOLID VINYL	2,5 MM SOLID VINYL
	5.5 MM	5.0 MM	2.5 MM
	0.55 MM	0.55 MM	0.55 MM
	CLASS 34	CLASS 33 CLASS 42	CLASS 33 CLASS 42
	PU-GUARD	ANTISCRATCH PU-GUARD	ANTISCRATCH PU-GUARD
	CONCRETE	CONCRETE	CONCRETE
	YES	YES	YES
	465 X 760 MM	457 X 914 MM	457 X 914 MM
	2.12 M <sup>2</sup> 6 TILES	1.672 M <sup>2</sup> 4 TILES	3.34 M <sup>2</sup> 8 TILES
	50 PACKS / PALLET	60 PACKS / PALLET	68 PACKS / PALLET
	875 KG	999.6 KG	1080 KG
	PASS	PASS	PASS
	≥ MSR-B3	MSR-B1	≥ MSR-B2
	< 2 KV	< 2 KV	< 2 KV
	R9/R10 DEPENDING ON EMBOSSING	R9/R10 DEPENDING ON EMBOSSING	R9/R10 DEPENDING ON EMBOSSING
	GROUP T	GROUP T	GROUP T
	PASS	PASS	PASS
	PASS	PASS	PASS
	BFL-S1	BFL-S1	BFL-S1
	CLASS E1	CLASS E1	CLASS E1
	25 YEARS	25 YEARS	25 YEARS
	10 YEARS	10 YEARS	10 YEARS



